

**TOYO
SEIKI
TOYOSEIKI**

Multifunction Floodlight Tower



Quality is Our Commitment, Service is Our Responsibility.

TSK-5400LT



Features:-

- High Spec, structure & large radius tires easy to move on uneven road surface even at site construction.
- Extra front outrigger flexible to fixing level adjustment.
- High demand for simple & solid fabricate to match every fieldwork.

Generator	Maximum Output A.C. (W)	5000
	Rated Output A.C. (W)	4500
	Rated Voltage A.C. (V)	230V
	Rated Current A.C. (A)	18.3
	Power Factor (%)	100
	Phase	Single Phase
	Frequency (Hz)	50
	Speed R.P.M.	3000
Engine	Model	KM 186FAG
	Rated Output PS R.P.M.	8.6, 3600
	Battery	NS 40
	Start System	Electric
Lighting	Type	Air Cooled
	Metal Halide	4 x 400 Watt
Dimension	Maximum Height	4 Meter Manual
	1497 (L) x 965 (W) x 4267 (H)mm	Lifted
Weight	1497 (L) x 965 (W) x 4267 (H)mm	Standard
	Whole Unit	280kg

TOYOSEIKI

TSK-5400LT (LP)

Features:-


- Exclusively designed for free angle lamp:-
 - i) left & right 45° angle
 - ii) up & down 60° angle
 - iii) Top of the horizontal masts is 360° angle rotation.
- Fully expansion designed for uneven surface.
- Low-profile structure easy to transportation.



- High-performance speed brake winch, safe, convenient & reduce lifting resistant.



- Hand-operated safety outrigger, quickly fixing with flexible level adjustment.

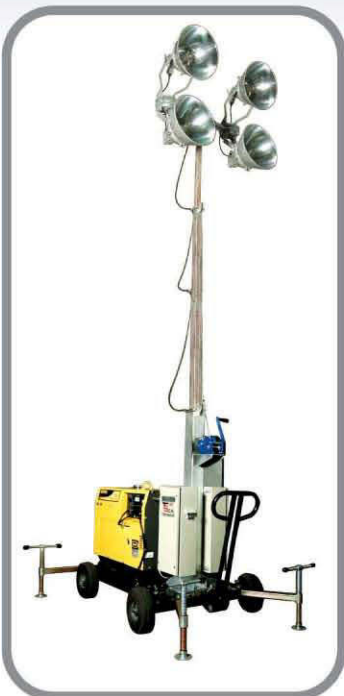

Generator	Maximum Output A.C. (W)	5000
	Rated Output A.C. (W)	4500
	Rated Voltage A.C. (V)	230V
	Rated Current A.C. (A)	18.3
	Power Factor (%)	100
	Phase	Single Phase
	Frequency (Hz)	50
	Speed R.P.M.	3000
Engine	Model	KM 186FAG
	Rated Output PS R.P.M.	8.6, 3600
	Battery	NS 40
	Start System	Electric
	Type	Air Cooled
Lighting	Metal Halide	4 x 400 Watt
	Maximum Height	4 Meter Manual
Dimension	1524 (L) x 1067 (W) x 4064 (H)mm	Lifted
	1524 (L) x 1067 (W) x 2235 (H)mm	Standard
Weight	Whole Unit	300kg

TSK-51000LT(LP)

Generator	Maximum Output A.C. (W)	5000
	Rated Output A.C. (W)	4500
	Rated Voltage A.C. (V)	230V
	Rated Current A.C. (A)	18.3
	Power Factor (%)	100
	Phase	Single Phase
	Frequency (Hz)	50
	Speed R.P.M.	3000
Engine	Model	KM 186FAG
	Rated Output PS R.P.M.	8.6, 3600
	Battery	NS 40
	Start System	Electric
	Type	Air Cooled
Lighting	Metal Halide	4 x 1000 Watt
	Maximum Height	4.5 Meter Manual
Dimension	1575 (L) x 1473 (W) x 4420 (H)mm	Lifted
	1575 (L) x 1473 (W) x 2540 (H)mm	Standard
Weight	Whole Unit	405kg



- Equipped with safety control board to eliminate kick-back voltage from control gear, avoid interrupt & damage due to AVR circuit board.



- 3-expandable masts with a scale of up to 4.5m high.
- Stable high power, large-scale & long distance illumination.
- Outriggers with dual structures in 4 directions & wind-resistant.



Proven track records over 40 units purchased by "PROPEL".
(North & South Highway Maintenance)

Provided lori crane to transport equipment without damage & collapse during delivery handling.

(Klang-valley only)



Bukit Tiara Damansara Golf & Country Club.

(use for reconstruct & maintenance for fairway course)



BESARAM HARDWARE & MACHINERY SDN. BHD. (88512-v)

www.besaram.com.my